


Residual Shear Test

Job No.: **Example**

Project: **Example**
 Boring No.: **Ex** Sample No. **Am** Depth: **13-14 ft**
 Location: **Ple** Sample Type: **3T**
 Soil Type: **Fat Clay w/sand and a trace of gravel (CH)**

Test Date:	10/30/2005
Date Reported:	10/30/2005
Shear Rate	
0.0009 (in/min)	
Liquid Limit:	59.8
Plastic Limit:	18.9
Plasticity Index:	40.9
Specific Gravity:	2.71

Remarks: Specimen was incrementally loaded to 7 tsf then unloaded to 0.5 tsf. Specimen sheared until readings were consistent. Specimen then loaded to 1.5 tsf and sheared until readings were consistent. Specimen was then loaded to 3.5 tsf and sheared until readings were consistent.

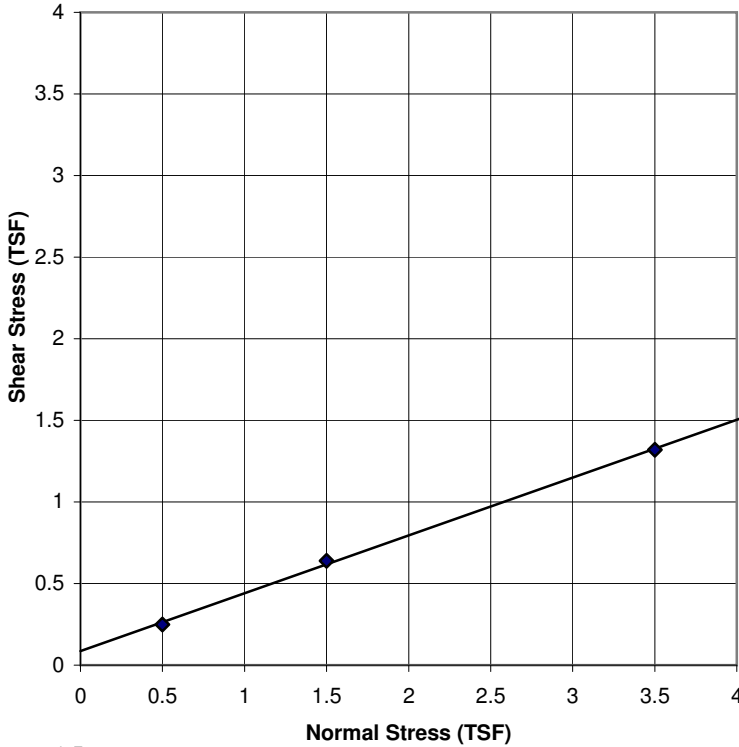

Failure Criterion:				
Residual Stress	<u>A</u>	<u>B</u>	<u>C</u>	<u>D</u>
Initial	▲	◇	○	X
Diameter (In.)	2.51			
Thickness (In.)	1.02			
Water Content (%)	49.2			
Dry Density (pcf)	66.5			
Before Shear				
Thickness (In.)	0.59			
Water Content (%)	17.6			
Dry Density (pcf)	114.6			
Normal Stress	0.50	1.50	3.50	
Shear Stress	0.25	0.64	1.32	

"These tests are for informational purposes only and must be reviewed by a qualified professional engineer to verify that the test parameters shown are appropriate for any particular design."

Residual	
Friction Angle: $\phi =$	19.5 deg.
Apparent Cohesion	0.087 TSF

